


VENTILATING FAN

- **WALL MOUNTED TYPE WITH SHUTTER**
- **CEILING MOUNTED TYPE**
- **LED LIGHTING VENTILATING FAN**

VENTILATING FAN

Wall Mounted Type With Shutter

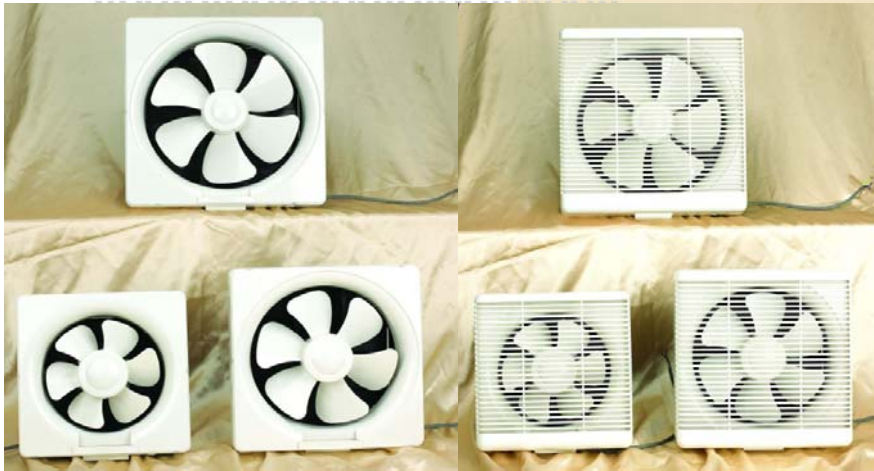

VENTILATING FAN (Ball Bearing Motor)

- Blind Type Design, Waterproof, Dust -Proof, Bug-Proof
- Electricity Saving ; Low Noise ; High Current
- Bidirectional Exhaust/Sucking Ventilator (Air In/Out)
- Cable length can be made 0.5M or depended on Request



SPECIFICATION (Without Panel Blind):

Model No.	Blade mm (inch)	Voltage (V)	Freq. (Hz)	Motor Power	Way	Air-flow (m^3 /pm)	Noise (dB)	Install (mm)	Panel (mm)	Size (mm) L x W x T
FT-06	ϕ 150 (6")	120V/ 230V	60Hz/ 50Hz	25W	1-Way (Air Out)	Out (270)	38	200	150x150	235 x 235 x 65
FT-08	ϕ 200 (8")	120V/ 230V	60Hz/ 50Hz	30W		Out (486)	42	250	180x180	290 x 290 x 70
FT-10	ϕ 250 (10")	120V/ 230V	60Hz/ 50Hz	35W		Out (720)	48	300	208x208	335 x 335 x 65
FT-12	ϕ 300 (12")	120V/ 230V	60Hz/ 50Hz	45W		Out (1080)	52	350	274x274	392 x 392 x 80
FT-08	ϕ 200 (8")	120V/ 230V	60Hz/ 50Hz	30W	2-Way (Air In/Out)	Out (486) In (360)	42	250	180x180	290 x 290 x 70
FT-10	ϕ 250 (10")	120V/ 230V	60Hz/ 50Hz	35W		Out (720) In (540)	48	300	208x208	335 x 335 x 65
FT-12	ϕ 300 (12")	120V/ 230V	60Hz/ 50Hz	45W		Out (1080) In (780)	52	350	274x274	392 x 392 x 80

SPECIFICATION (With Panel Blind/Safety device) :

Model No.	Blade mm (inch)	Voltage (V)	Freq. (Hz)	Motor Power	Way	Air-flow (m^3 /pm)	Noise (dB)	Install (mm)	Panel (mm)	Size (mm) L x W x T
FN-06	ϕ 150 (6")	120V/ 230V	60Hz/ 50Hz	25W	1-Way (Air Out)	Out (270)	38	200	150x150	235 x 235 x 65
FN-08	ϕ 200 (8")	120V/ 230V	60Hz/ 50Hz	30W		Out (486)	42	250	180x180	290 x 290 x 70
FN-10	ϕ 250 (10")	120V/ 230V	60Hz/ 50Hz	35W		Out (720)	48	300	208x208	335 x 335 x 65
FN-12	ϕ 300 (12")	120V/ 230V	60Hz/ 50Hz	45W		Out (1080)	52	350	274x274	392 x 392 x 80
FN-08	ϕ 200 (8")	120V/ 230V	60Hz/ 50Hz	30W	2-Way (Air In/Out)	Out (486) In (360)	42	250	180x180	290 x 290 x 70
FN-10	ϕ 250 (10")	120V/ 230V	60Hz/ 50Hz	35W		Out (720) In (540)	48	300	208x208	335 x 335 x 65
FN-12	ϕ 300 (12")	120V/ 230V	60Hz/ 50Hz	45W		Out (1080) In (780)	52	350	274x274	392 x 392 x 80

** Material : PP, ABS, PP Body With Meal Base Are All Available**

VENTILATING FAN

Ceiling Mounted Type



VENTILATING FAN

- Made of High Quality ABS Plastic
- 7-Fan Blades Exhaust Fast And Strong ;
Fan Designed With Ultra Thin Front Panel And Shutter
(When Ventilation Works, The Front Shutter Will
Open Automatically)
- Ball Bearing Motor Has Slow Heating Up And Long
Service Lifetime
- With 3 x 0.5mm² Power Cord
- Suitable For Ceiling Mounting Or Fixing On Wall



SPECIFICATION :

Model No.	Blade mm (inch)	Voltage (V)	Freq. (Hz)	Input (W)	Air-flow (m ³ /pm)	Noise (dB)	Install (mm)	Panel (mm)	Size (mm) L x W x T x Dia.Ø
FC-04	φ 90 (4")	120V/ 230V	60Hz/ 50Hz	14W	80	33	Ø100	150x150	150 x 150 x 94 x 98
FC-05	φ 108 (5")	120V/ 230V	60Hz/ 50Hz	17W	150	35	Ø120	180x180	180 x 180 x 97 x 117
FC-06	φ 135 (6")	120V/ 230V	60Hz/ 50Hz	22W	250	37	Ø150	208x208	208 x 208 x 105 x 147
FC-08	φ 180 (8")	120V/ 230V	60Hz/ 50Hz	25W	370	39	Ø200	274x274	274 x 274 x 112 x 195

SPECIFICATION (With Indicator Light) :

Model No.	Blade mm (inch)	Voltage (V)	Freq. (Hz)	Input (W)	Air-flow (m ³ /pm)	Noise (dB)	Install (mm)	Panel (mm)	Size (mm) L x W x T x Dia.Ø
FD-04	φ 90 (4")	120V/ 230V	60Hz/ 50Hz	14W	80	33	Ø100	157x157	157 x 157 x 80 x 98
FD-05	φ 108 (5")	120V/ 230V	60Hz/ 50Hz	17W	150	35	Ø120	157x157	157 x 157 x 83 x 117
FD-06	φ 135 (6")	120V/ 230V	60Hz/ 50Hz	22W	250	37	Ø150	200x200	200 x 200 x 95 x 147

** Can also be added pulling switch cable 0.5meter**

VENTILATING FAN With LED Lighting- Ceiling Mounted Type



LED LIGHTING VENTILATING FAN

- Extraction capacity: 160m³/hr
- Ball bearing motor
- Available in white and silver panel
- LED panel light
- Brightness output of 1100lm
- Color temperature is available for 3000K warm white, 4500K cool white and 6500K daylight.
- Ø100mm side duct with draft stopper
- IP45 rated - Suitable for installation above showers
- With power cord: 3G0.75mm² for AC120V
3G0.5mm² for AC230V;



SPECIFICATION :

Model No.	Motor Power	Lighting Power	Voltage (V)	Freq. (Hz)	Color Temperature	Air-flow (m ³ /pm)	Noise (dB)	Install (mm)	Panel (mm)	Size (mm) L x W x Depth
FV-12R01	36W	16W	120V/ 230V	60Hz/ 50Hz	3000K	260	45	Ø295	Ø325	Ø325 x 160
FV-12R02	40W				4500K	350	48			
FV-12C.01	36W	16W	120V/ 230V	60Hz/ 50Hz	3000K	260	45	Ø295	300x300	300x300x160
FV-12C.02	40W				4500K	350	48			
FV-12S.01	36W	16W	120V/ 230V	60Hz/ 50Hz	3000K	260	45	Ø295	300x300	300x300x160
FV-12S.02	40W				4500K	350	48			

FV12R.120 AC120V
FV12R.230 AC230V

FV12C.120 AC120V
FV12C.230 AC230V

FV12S.120 AC120V
FV12S.230 AC230V



Panel Ø325mm
Install space 295mm



Panel 300mmx300mm
Install space 295mm



Silver panel

Panel 300mmx300mm
Install space 95mm